

PCT

WORLD INTELLECTUAL PROPERTY ORGANIZATION
International Bureau



INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification ⁶ : A61F 13/66 // 13/64	A1	(11) International Publication Number: WO 97/33547 (43) International Publication Date: 18 September 1997 (18.09.97)
--	----	---

(21) International Application Number: PCT/SE97/00370
(22) International Filing Date: 4 March 1997 (04.03.97)

(30) Priority Data:
9600965-9 13 March 1996 (13.03.96) SE

(71) Applicant (for all designated States except US): SCA
MÖLNLYCKE AB [SE/SE]; S-405 03 Göteborg (SE).

(72) Inventor; and

(75) Inventor/Applicant (for US only): RÖNNBERG, Peter
[SE/SE]; Råvekarngatan 265, S-431 33 Mölndal (SE).

(74) Agents: HYLINER, Jan-Olof et al.; Noréns Patentbyrå AB,
P.O. Box 10198, S-100 55 Stockholm (SE).

(81) Designated States: JP, US, European patent (AT, BE, CH, DE,
DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE).

Published


With international search report.

In English translation (filed in Swedish).

(54) Title: A WAIST BELT FOR ABSORBENT ARTICLES AND A METHOD FOR ITS MANUFACTURE

(57) Abstract

A waist belt for supporting disposable-type absorbent articles (7), such as incontinence guards or diapers which comprise a front part, a rear part and an intermediate crotch part, wherein the belt can be fastened to the rear part of the article and when fastened to the rear part of the article comprises two front portions (3, 4) which project out laterally from mutually opposing side edges of the rear part of the article and which can be fastened together through the medium of mechanical fastener elements (12, 14) to form a waist band and which taper towards their respective ends over at least a substantial part of their lengths. According to the invention, each of the front portions includes first fastener elements (12, 13) which are disposed on the outside of the belt, i.e. that side which faces outwardly in relation to the wearer's body in use, and which extend at least over essentially the whole of the tapering portions of the front portions (10, 11) along the longitudinal symmetry lines thereof, and in that a second fastener element (14) is provided on the inside of one of the front portions at the end part thereof and can be fastened to the first fastener element on the other front portion along a plurality of mutually spaced points along the longitudinal symmetry line of the other front portion. The invention also relates to a method for producing the front portions of a waist belt.

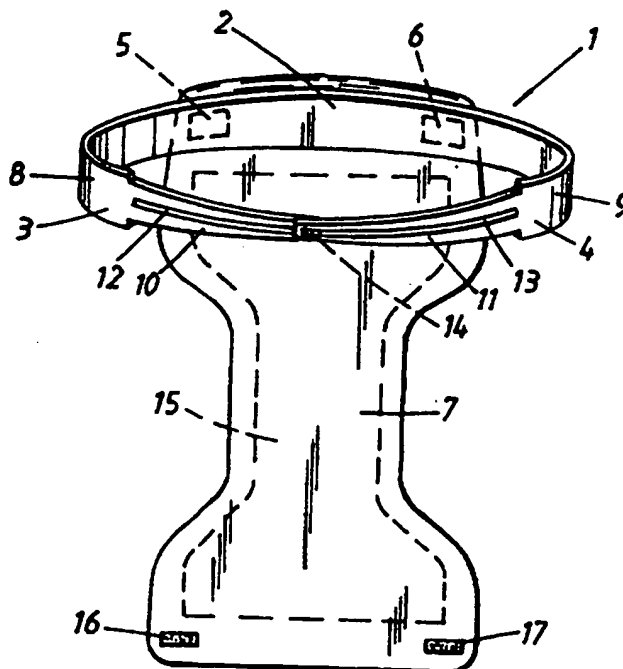

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AM	Armenia	GB	United Kingdom	MW	Malawi
AT	Austria	GE	Georgia	MX	Mexico
AU	Australia	GN	Guinea	NE	Niger
BB	Barbados	GR	Greece	NL	Netherlands
BE	Belgium	HU	Hungary	NO	Norway
BF	Burkina Faso	IE	Ireland	NZ	New Zealand
BG	Bulgaria	IT	Italy	PL	Poland
BJ	Benin	JP	Japan	PT	Portugal
BR	Brazil	KE	Kenya	RO	Romania
BY	Belarus	KG	Kyrgyzstan	RU	Russian Federation
CA	Canada	KP	Democratic People's Republic of Korea	SD	Sudan
CF	Central African Republic	KR	Republic of Korea	SE	Sweden
CG	Congo	KZ	Kazakhstan	SG	Singapore
CH	Switzerland	LJ	Liechtenstein	SI	Slovenia
CI	Côte d'Ivoire	LK	Sri Lanka	SK	Slovakia
CM	Cameroon	LR	Liberia	SN	Senegal
CN	China	LT	Lithuania	SZ	Swaziland
CS	Czechoslovakia	LU	Luxembourg	TD	Chad
CZ	Czech Republic	LV	Latvia	TC	Togo
DE	Germany	MC	Monaco	TJ	Tajikistan
DK	Denmark	MD	Republic of Moldova	TT	Trinidad and Tobago
EE	Estonia	MG	Madagascar	UA	Ukraine
ES	Spain	ML	Mali	UG	Uganda
FI	Finland	MN	Mongolia	US	United States of America
FR	France	MR	Mauritania	UZ	Uzbekistan
GA	Gabon			VN	Viet Nam

**A WAIST BELT FOR ABSORBENT ARTICLES
AND A METHOD OF ITS MANUFACTURE**

5 The present invention relates to a waist belt for supporting
disposable-type absorbent articles, such as incontinence
guards or diapers which comprise a front part, a rear part
and an intermediate crotch part, wherein the belt can be
fastened to the rear part of the article and when fastened
to the rear part of the article comprises two front portions
10 which project out laterally from mutually opposing side edges
of the rear part of said article and which can be fastened
together through the medium of mechanical fastener elements
to form a waist band and which taper towards their respective
ends over at least a substantial part of their lengths. The
15 invention also relates to a method of manufacturing such a
belt.

20 A waist belt of the type to which the invention refers is
known from Applicant's Swedish Application No. 9301631-9. The
waist belt described in this publication is relatively
expensive to produce, because the loop-bearing material
intended for coaction with the hook-bearing means extends
over the full extent of the outer surface of the belt,
therewith resulting in high material costs.

25 The main object of the present invention is to reduce the
cost of manufacturing a waist belt of this kind, so that a
well-functioning disposable waist belt can be produced at a
reasonable price.

30 EP-A2-0,528,282 teaches a diaper in which one end of the
outer casing sheets is extended laterally to form extended
flaps which by forming a waist band enable the diaper to be
placed on a baby with the baby in a standing position. The
35 flaps include mechanical fastener elements which can be
fastened to one another and to the side-portions of opposing
ends of the diaper. The extended flaps, however, do not

support the opposing end of the diaper, which is fastened instead to the side-portions of that diaper end which includes the extended flaps, in a manner which makes it difficult for the baby to reach the fastener points. The
5 problem which the present invention intends to solve is neither mentioned nor indicated in this publication.

This object is achieved in accordance with the present invention with a waist belt of the aforedefined kind which
10 is characterized in that each of the front portions includes first fastener elements which are disposed on the outside of the belt, i.e. that side which faces outwardly in relation to the wearer's body in use, and which extend at least over essentially the whole of the tapering portions of the front
15 portions along the longitudinal symmetry lines thereof, and in that a second fastener element is provided on the inside of one of the front portions at the end part thereof and which can be fastened to the first fastener element on the other front portion along a plurality of mutually spaced
20 points in the extension of the longitudinal symmetry line of said other front portion. Such a belt can be produced essentially with no waste, and by using separate first fastener elements and placing said elements along the longitudinal symmetry line of the waist belt, it is possible
25 to use fastener elements of optimal width. Furthermore, the belt is easy to handle, by virtue of the fact that the second fastener element is placed at the end portion where the belt is narrowest. This greatly reduces the risk of the first and the second fastener elements being displaced relative to one
30 another in the transverse direction when putting on the belt.

In a preferred embodiment of the invention, the first fastener elements are spaced from the longitudinal edges of the front portion along at least the greatest part of the
35 length of said elements. The first fastener elements are rectangular in shape and have a width of between 20-150 mm, preferably between 30-50 mm. The first fastener elements are

produced from a loop-bearing material and the second fastener elements from a hook-bearing material. The front portions are joined firmly to the side-portions of the rear part of an absorbent article and each include a rectangular part of uniform width which is attached to a side-portion of the rear part of an absorbent article, and a uniformly tapering part which projects out from the rectangular part on said front portion and has a greatest width which is smaller than the width of the rectangular part.

10

The invention also relates to a method of producing tapering waist-belt front portion with a starting point from a travelling web of material, characterized by placing elongated first fastener elements on and fastening said elements to the web in a mutually sequential row and at a given distance apart with the longitudinal axes of said elements extending perpendicularly to the direction of web travel; cutting the web in accordance with a cutting pattern which includes mutually opposing rows of short-side cuts along each alternate short side of the first fastener elements, said rows being displaced relative to one another in the direction of web travel so that the cuts relating to mutually adjacent first fastener elements will be located along mutually opposing short sides, cuts which extend perpendicularly to the direction of web travel and which extend from the centre of each short-side cut in a direction away from the fastener elements, and connecting cuts which connect the ends of said mutually opposing short-side cuts, wherein second fastener elements intended for coaction with the first fastener elements are fastened to the material web in a row on the side that is opposite to the first fastener elements and centrally opposite those end parts of the first fastener elements that face towards one of the rows of short-side cuts, either before or after attaching the first fastener elements. The method enables front portions intended for integration in the rear part of an incontinence guard or diaper to be produced with practically no waste.

35

The invention will now be described with reference to the accompanying drawings, in which

5 Fig. 1 is a schematic perspective view of a first embodiment of an inventive waist belt and a coacting incontinence guard;

Fig. 2 is a schematic perspective view of a second embodiment of an inventive waist belt;

10 Figs. 3-6 illustrate different embodiments of a waist belt front portion;

Fig. 7 is a schematic side view of apparatus for producing front portions of a waist belt of the kind illustrated in
15 Figures 2 and 3; and

Fig. 8 is a sectioned view of a web of material that has passed through the apparatus shown in Figure 7.

20 The waist belt 1 illustrated in Figure 1 is made of a flexible material and includes a rear portion 2 and two front portions 3, 4. The rear portion 2 carries on the outside thereof two mechanical fastener elements 5, 6 for coaction with complementary fastener elements on the rear part of an
25 incontinence guard 7. The mutually complementary mechanical fastener elements may comprise pieces of hook-bearing and loop-bearing material, such as some type of touch and close fasteners or like fasteners. The hook fasteners are preferably mounted on the incontinence guard and the loop fasteners
30 on the belt.

The waist-belt front portions 3, 4 include a relatively broad rear part 8 and 9 respectively, which connect with the rear portions and stretch over the hips of the wearer in use.
35 Tapering or narrowing portions 10 and 11 extend from respective rear parts. Narrow, elongated and rectangular fastener elements 12 and 13 extend along the longitudinal symmetry

lines of the tapering portions 10, 11, these fastener elements preferably comprising loop-bearing material. A fastener element 14 complementary to the fastener element 12, preferably a hook-bearing fastener element, is attached to the inside of the front portion 11 at the end part thereof. Figure 1 shows the belt when fastened together, i.e. with the fastener element 14 in engagement with the fastener element 12. As will be understood, because the element 12 extends along substantially the full length of the tapering part 10, the illustrated waist belt can be adjusted to fit around the waist of many users having mutually different waist sizes.

The combination of waist belt 1 and incontinence guard 7 illustrated in Figure 1 is placed on a standing user in the following way.

The rear edge part of the incontinence guard 7 is first attached to the rear portion of the waist belt through the mutual coaction of fastener elements on the incontinence guard 7 and the belt 1. In the Figure 1 embodiment, that part of the casing sheet which lies outwardly of the absorbent body 15 is attached to the outside of the belt with the aid of the belt fastener elements 5, 6. Naturally, the fastener elements 5, 6 may be placed on the inside of the belt and the corresponding fastener elements of the incontinence guard on the outside of the rear-edge part, this latter alternative being suitable when those parts of the casing sheets that lie outside the absorbent body are narrower than the rear part of the belt. In the case of the illustrated embodiment, the rear part of the incontinence guard 7 may be attached to the rear part of the waist belt before passing or after having passed the front portions 3, 4 of the belt around the user's waist and fastened said portions together with the aid of the fastener elements 12, 14.

When the waist belt has been fastened around the wearer's waist and the incontinence guard has been fastened to the

- 5 rear-edge part of the belt, the downwardly hanging front portion is brought forwards between the wearer's legs and then upwards so that its front edge will lie level with the upper edge of the waist belt, whereafter the fastener elements 16, 17 on the inside of the front part of the incontinence guard are pressed into fastening abutment with the fastener elements 12, 13 on the tapering parts 10, 11 of the front portions of the belt 1.
- 10 After the front part of the incontinence guard has been fastened to the waist belt, that part of the waist belt which is located between the respective attachment points 5, 6 and 16, 17 on the rear-edge part and front-edge part of the incontinence guard has no actual function, since the front-
15 edge parts and rear-edge parts of the incontinence guard are able to function as parts of a waist band just as well as corresponding parts of the waist belt. Consequently, the strength of the connection 12, 14 need only be sufficient to hold the rear part of the incontinence guard in place as
20 the incontinence guard and waist belt are put on. Thus, it is only necessary to dimension the fastener elements 16, 17 to provide an optimal strength in combination with the fastener elements 12, 13. This enables the fastener element 14 to be given smaller dimensions, therewith enabling narrow
25 fastener elements 12, 13 to be used. The length of the fastener elements 16, 17, i.e. their extension in the longitudinal direction of the fastener elements 12, 13, may be adapted so as to obtain the requisite strength in the connections 12, 16 and 13, 17 respectively. Figure 1 illustrates an embodiment which includes two fastener elements on
30 respective rear-edge and front-edge portions of the incontinence guard 7. Because the fastener elements 12, 13 on the front portions of the waist belt extend over essentially the full length of the tapering portions 10, 11, it is possible
35 to mount more than two fastener elements on the front part of the incontinence guard, said elements being able to coact with the fastener elements 12, 13 irrespective of the extent

to which the belt portions 10, 11 overlap one another in accordance with the different waist sizes of different wearers.

5 The invention thus provides a waist belt which is sufficiently broad in the hip region to afford good comfort to the wearer, but which tapers at its front portions and therewith affords a saving in material in comparison with earlier known belts of this kind that have generally uniform widths. In
10 comparison with belts that are provided with loop-bearing material over the whole of their extension, the inventive belt further saves in cost because only parts of the belt are provided with loop-bearing material. This enables the belt to be produced from an inexpensive plastic material, such as
15 polyethylene for instance. Furthermore, the loop-bearing material and the belt material may be chosen optimally for their respective functions, independently of each other.

The mutually coacting fastener elements are preferably
20 comprised of hook-bearing material and loop-bearing material of the Velcro® fastener type. The loop-bearing material will suitably have a width of between 20-150 mm, preferably between 30-50 mm. The ends of the tapering portions of the front portions of the waist belt have essentially the same
25 width as the loop-bearing material. This reduces the risk of the hook-bearing element on one of the front portions being incorrectly positioned when being fastened to a coacting fastener element on the other of said front portions. The elongated loop-bearing material will have a length of between
30 200-800 mm, preferably between 300-440 mm.

Figure 2 illustrates schematically a second embodiment of a waist belt integrated in an incontinence guard 7'. The sole difference between this waist belt and the belt 1 illustrated
35 in Figure 1 is that the rear part of the belt is comprised of the rear-edge part of the incontinence guard. Those components of the Figure 2 embodiment which find correspon-

dence with the components of the Figure 1 embodiment have been identified with the same reference signs although with the addition of a prime. The front portions 3', 4' of the waist belt are thus fastened directly to the side edges of the rear-part of the incontinence guard, e.g. glued or ultrasonically welded thereto. In other regards, the front portions of the waist belt shown in Figure 2 are identical with the front portions shown in Figure 1 and reference is made to the description of these portions with regard to the Figure 2 embodiment. Figure 3 illustrates a front portion 4' in larger scale.

In the described embodiments, the front portions of a waist belt taper at first instantaneously and thereafter continuously to the ends of said portions. Although this configuration is preferred for manufacturing reasons of a technical nature, other configurations are conceivable. Figures 4-6 illustrate respectively feasible, although not preferred, configurations.

20

A preferred method of producing the front portions of a waist belt according to Figures 2 and 3 will now be described with reference to Figures 7 and 8.

25 A web 18 of flexible material, e.g. 1 mm thick nonwoven, is unreeled from a storage reel R and moved through two stations A and B with the aid of conveyor means (not shown), e.g. an endless belt conveyor. Elongated, rectangular strips 19 of fastener element material are placed on the web in station
30 A with the longitudinal axes of said strips extending at right angles to the direction of web travel and at a specific distance apart, said strips being fastened to the web, e.g. glued thereto. The web is cut in station B in accordance with a repetitive cutting pattern. Figure 8 illustrates from above
35 a section of a web 18 that has passed through station B. As will be seen from Figure 8, the cutting pattern includes two rows of short-side cuts S1, S2, each of which extends along

an alternate short side of the strips 19 at a slight distance therefrom and on opposite sides of the strips 19. In the case illustrated in Figure 8, the row of short-side cuts S1 extend on the left side of the strips 19, whereas the row of short-side cuts S2 extend on the right side of the strips. The rows of short-side cuts S1, S2 are also displaced relative to one another, such that each strip 19 will have a short-side cut S1 or S2 along one of its short sides. The ends of mutually adjacent short-side cuts S1, S2 are joined together by cuts S3, S4. The cutting pattern also includes transverse cuts S5, S6 extending from the centre of each short-side cut and out to the nearest long edge of the web 18. As will be seen from Figure 8, cutting of the web in the aforescribed manner results in the formation of front portions 3', 4' of the waist belt shown in Figures 2 and 3.

Rows of fastener elements complementary to the fastener element strips 19 are attached in some suitable manner to the underside of the web 18 centrally opposite the end-parts of those ends of the strips along which short-side cuts S1 extend.

The aforescribed method thus enables the front portions of a waist belt of the kind illustrated in Figure 2 to be formed in a simple manner and essentially without waste, this latter contributing to the fact that such front portions can be produced relatively cheaply.

It will be understood that the aforescribed method can be modified within the scope of the invention. For instance, the short-side cuts S1, S2 may be curved when desiring front portions with rounded ends. Further, the short-side cuts may extend longitudinally beyond the short sides of the strips when desiring the cuts S3, S4 to be located further away from the longitudinal edges of the strips 19 in those strip end parts that have short-side cuts along the short sides. The strip short sides need not be straight, but may alternatively

be curved or triangular in shape. Such shapes are included by the term rectangular used in the Claims. The invention is therefore restricted solely by the contents of the following Claims.

CLAIMS

1. A waist belt for supporting disposable-type absorbent articles (7; 7'), such as incontinence guards or diapers which comprise a front part, a rear part and an intermediate crotch part, wherein the belt can be fastened to the rear part of the article and when fastened to the rear part of the article comprises two front portions (3, 4; 3', 4') which project out laterally from mutually opposing side edges of the rear part of said article and which can be fastened together through the medium of mechanical fastener elements (12, 14; 12', 14') to form a waist band and which taper towards their respective ends over at least a substantial part of their lengths, characterized in that each of the front portions includes first fastener elements (12, 13; 12', 13') which are disposed on the outside of the belt, i.e. that side which faces outwardly in relation to the wearer's body in use, and which extend at least over essentially the whole of the tapering portions of the front portions (10, 11; 10', 11') along the longitudinal symmetry lines thereof, and in that a second fastener element (14; 14') is provided on the inside of one of the front parts at the end portion thereof and can be fastened to the first element on the other front portion along a plurality of mutually spaced points along the longitudinal symmetry line of said other front portion.

2. A waist belt according to Claim 1, characterized in that the first fastener elements (12, 13; 12', 13') are spaced from the longitudinal edges of the front portions (3, 4; 3', 4') at least along the major part of the length of said first fastener elements.

3. A waist belt according to Claim 2, characterized in that the first fastener elements (12, 13; 12', 13') are rectangular in shape and have a width of between 20-150 mm, preferably between 30-50 mm.

4. A waist belt according to any one of Claims 1-3, characterized in that the first fastener elements (12, 13; 12', 13') are made of a loop-bearing material and the other fastener element (14; 14') is made of a hook-bearing material.
5. A waist belt according to any one of the preceding Claims, characterized in that the front portions (3', 4') are firmly connected to the side portions of the rear part of an absorbent article.
6. A waist belt according to Claim 5, characterized in that each of the front portions (3', 4') includes a rectangular part (8', 9') of uniform width which is fastened to a side portion of the rear part of an absorbent article, and a uniformly tapering portion (10', 11') which projects out from the rectangular part of the front portion and which has a greatest width which is smaller than the width of the rectangular part.
7. A method of producing tapering front portions for a waist belt with a starting point from a moving web of material (18), characterized by placing elongated first fastener elements (19) on and fastening said elements to the web (18) in a mutually sequential row and at a given distance apart with the longitudinal axes of said elements extending perpendicularly to the direction of web travel; cutting the web (18) in accordance with a cutting pattern which includes mutually opposing rows of short-side cuts (S1, S2) along each alternate short side of the first fastener elements (19), said rows being displaced relative to one another in the direction of web travel so that the cuts (S1, S2) relating to mutually adjacent first fastener elements will be located along mutually opposing short sides, which further includes cuts (S5, S6) that extend perpendicularly to the direction of web travel and that extend from the centre of each short-side cut (S1, S2) in a direction away from the fastener

elements, and connecting cuts (S3, S4) that connect the ends of said mutually opposing short-side cuts, wherein second fastener elements intended for coaction with the first fastener elements are fastened to the material web in a row on the side opposite to the first fastener elements and centrally opposite those end parts of the first fastener elements that face towards one of the rows of short-side cuts (S1) either before or after attaching the first fastener elements.

1 / 3

Fig. 1


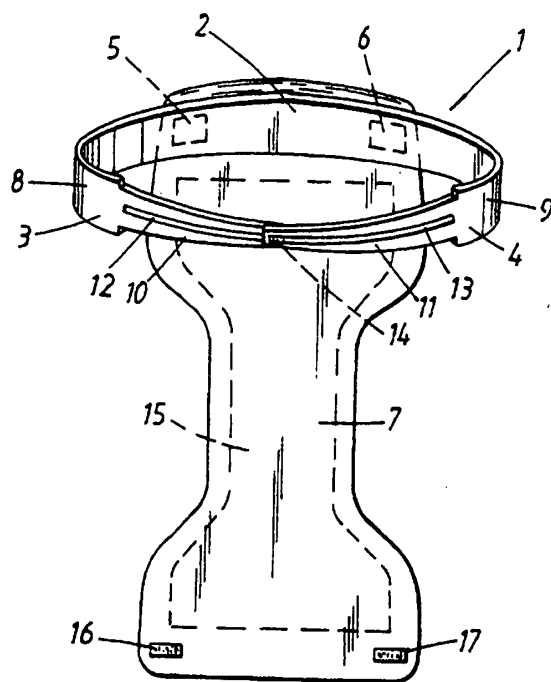


Fig. 2

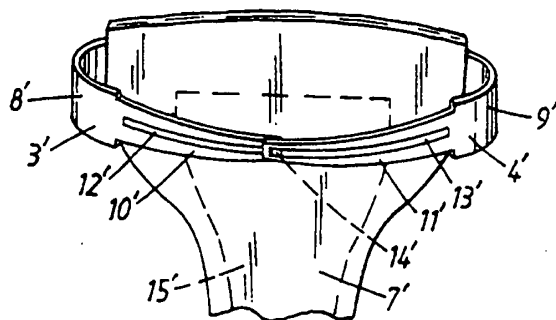

2 / 3

Fig. 3

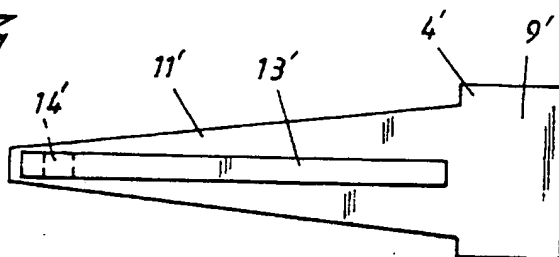


Fig. 4

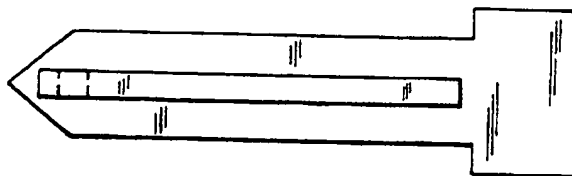


Fig. 5


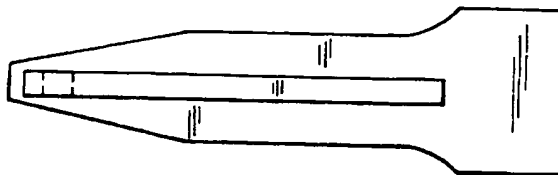


Fig. 6

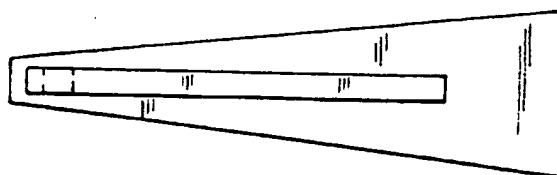

3 / 3

Fig. 7


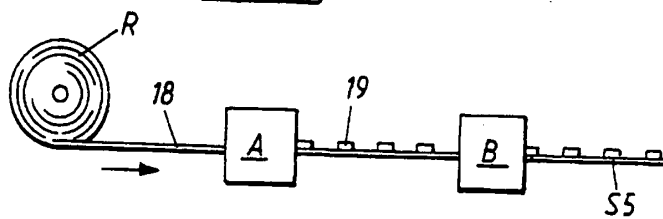


Fig. 8

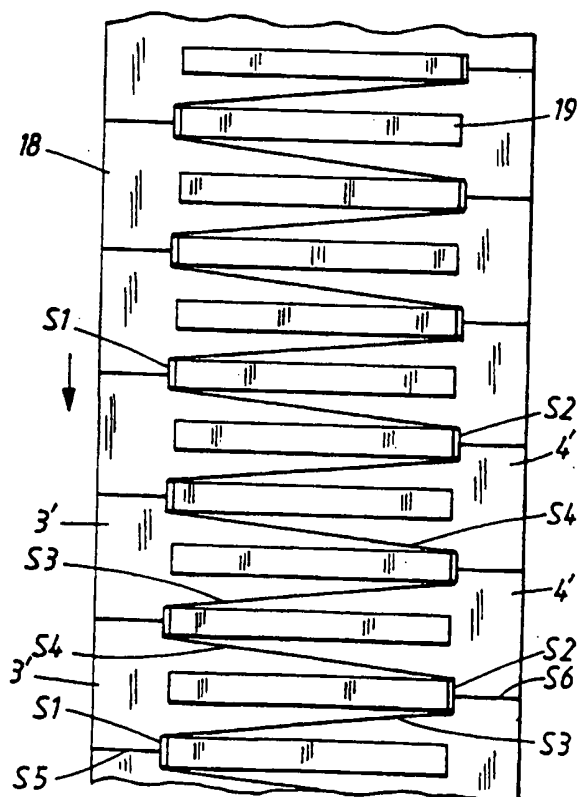

INTERNATIONAL SEARCH REPORT

International application No.

PCT/SE 97/00370

A. CLASSIFICATION OF SUBJECT MATTER

IPC6: A61F 13/66 // A61F 13/64

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC6: A61F

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

SE,DK,FI,NO classes as above

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	WO 9108725 A1 (THE PROCTER & GAMBLE COMPANY), 27 June 1991 (27.06.91) --	1-7
A	US 5261901 A (L. GUAY), 16 November 1993 (16.11.93) -----	1-7

☐ Further documents are listed in the continuation of Box C.☒ See patent family annex.

* Special categories of cited documents:

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier document but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance: the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance: the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"&" document member of the same patent family

Date of the actual completion of the international search

23 June 1997

Date of mailing of the international search report

26 -06- 1997

Name and mailing address of the ISA/
Swedish Patent Office

Box 5055, S-102 42 STOCKHOLM

Facsimile No. +46 8 666 02 86

Authorized officer

Ingrid Falk

Telephone No. +46 8 782 25 00

INTERNATIONAL SEARCH REPORT
Information on patent family members

03/06/97

International application No.

PCT/SE 97/00370

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
WO 9108725 A1	27/06/91	AU 657902 B	30/03/95
		AU 6907291 A	18/07/91
		CA 2072630 A	21/06/91
		CN 1024746 B	01/06/94
		CN 1054531 A	18/09/91
		CN 1054711 A	25/09/91
		EG 18966 A	30/10/94
		EP 0506745 A	07/10/92
		JP 5502177 T	22/04/93
		NZ 236552 A	26/09/95
		US H1440 H	02/05/95
US 5261901 A	16/11/93	AU 6289290 A	08/04/91
		CA 2028116 A	05/03/91
		WO 9103220 A	21/03/91